



# Manual Utility Pump

Model No.  
BWU033P

**1/3 HP**

Pumping Capacity  
**37 GPM**  
with a 1-1/4" hose at 0'

**Submersible  
Pump**

Turns on when water is detected

**Adapter  
Included**

Connects to a garden hose  
or 1-1/4" flexible plastic hose



[www.basementwatchdog.com](http://www.basementwatchdog.com)


*Watching Out for You!*



## Features

- Pumps up to 37 GPM at 0 ft. with a 1-1/4" flexible plastic hose or 24 GPM at 0 ft. lift with garden hose
- Pumps water down to 1/4"
- Built-in air relief valve prevents air locks
- Includes multi-purpose adapter fitting for 1-1/4" flexible sump pump discharge hose
  - 45° angle prevents hose kink at pump connection
- Removable intake screen for easy cleaning of debris
- 10 ft. power cord
- 1 year limited warranty

## Setup Guide

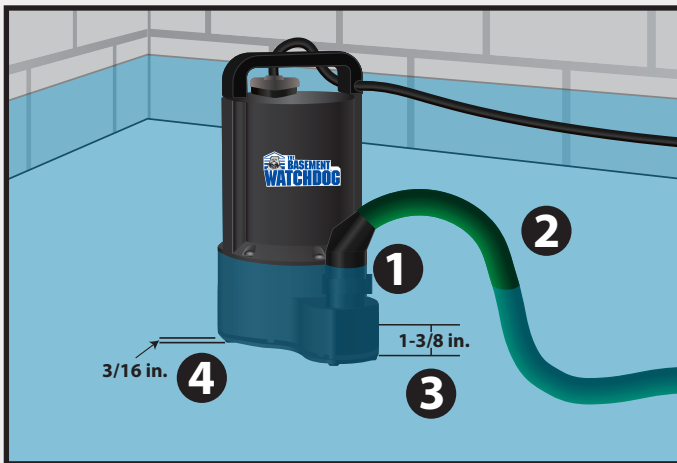

- Attach and tighten included hose adapter to utility pump
- Attach garden hose or 1-1/4" flexible plastic hose – sold separately
- Pump activates at a minimum depth of 1-3/4" of water
- Pump automatically turns off when there is approximately 1/4" of water remaining

### Materials Needed:

- Garden hose or 1-1/4" flexible sump pump discharge hose

## Pump Highlights



- 1. Energy Efficient Permanent Split Capacitor (PSC) Motor**  
Uses less electricity, without sacrificing performance  
Only draws 2.5 Amps!
- 2. Handle with Power Cord Holder**  
Lessens the strain on the power cord
- 3. Air Relief Valve**  
Prevents Air Lock
- 4. Multi-Purpose Adapter Fitting:**
  - Connects utility pump to 3/4" garden hose or 1-1/4" flexible sump pump discharge hose
  - 45° angle prevents hose kink at pump connection
- 5. Intake Screen**  
Removable for easy cleaning
- 6. Power Cord**  
10 Ft.

## Applications

The Basement Watchdog Automatic Utility Pump can be used in a variety of areas including:

- Wet basements
- Window wells
- Pool covers
- Boats
- Other areas that can collect water

### Limitations:

- Do not install as a permanent fixture or as a sump pump
- Do not use as a fountain or pond pump

## Pump Performance

### Pump Performance with 1-1/4" Flexible Plastic Hose

Pumping Level (Discharge height above head)	0 ft.	5 ft.	10 ft.	15 ft.	20 ft.	21 ft. Max
GPH (Gallons per hour)	2,200	1,860	1,440	960	270	-
GPM (Gallons per minute)	37	31	24	16	4.5	0

### Pump Performance with Garden Hose

Pumping Level (Discharge height above head)	0 ft.	5 ft.	10 ft.	15 ft.	19 ft.	20ft. Max
GPH (Gallons per hour)	1,440	1,200	840	510	150	-
GPM (Gallons per minute)	24	20	14	8.5	2.5	0



[www.basementwatchdog.com](http://www.basementwatchdog.com)

*Watching Out for You!*

